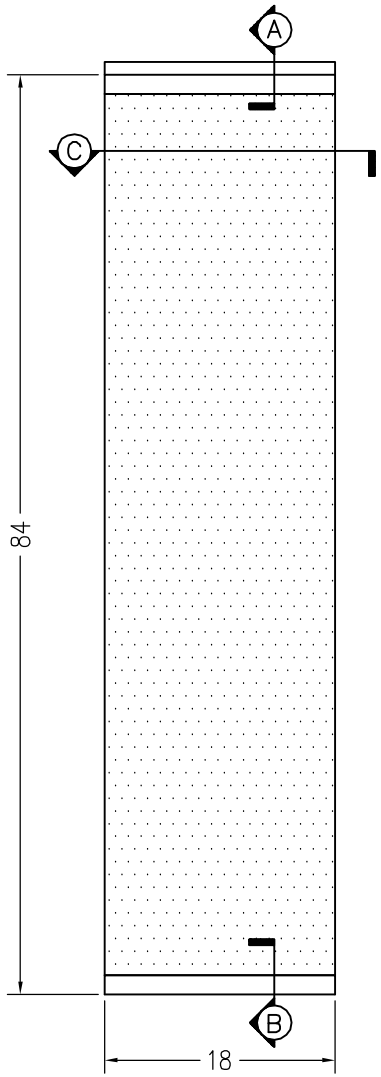

FRONT VIEW



RIGHT SIDE VIEW

DETAIL 'A'

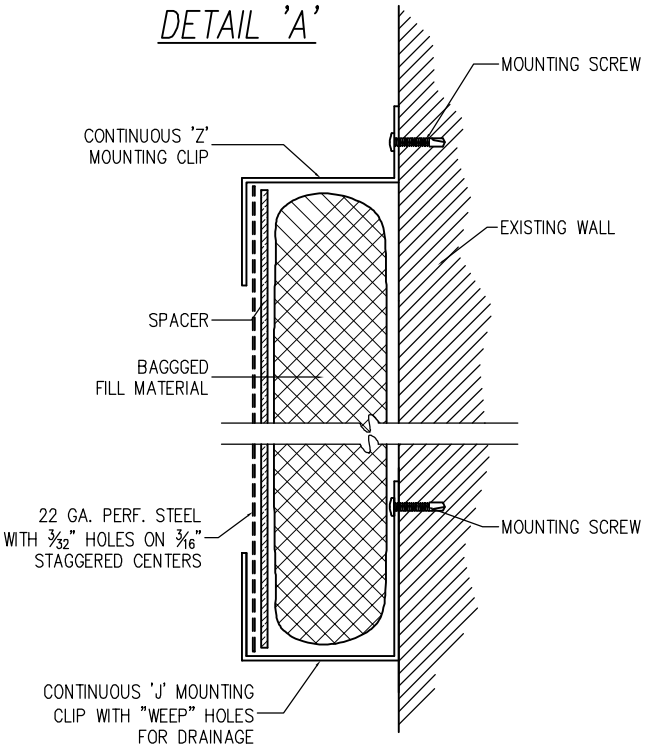

DETAIL 'B'

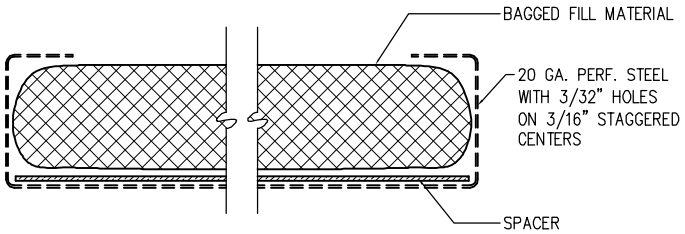

DETAIL 'C'

GENERAL NOTES:

1. BOTH THE 'Z' TYPE AND 'J' TYPE CONTINUOS MOUNTING CLIPS ARE MADE OF 16 GA. BENT STEEL
2. THE PERFORATED FACE SHEET IS 22 GA. GALVINIZED PERF. WITH 3/32" HOLES ON 3/16" STAGGERED CENTERS
3. SPACER IS SELF-FURRING GALVINIZED LATH
4. FILL MATERIAL IS BAGGED FIBERGLASS ACOUSTIC FILL
5. MOUNTING FASTENERS DETERMINED BY EXISTING WALL SURFACE

SOUND ABSORPTION COEFFICIENTS

OCTAVE BAND CENTER FREQUENCIES (Hz)	125	250	500	1K	2K	4K	NRC
NB-II (WITHOUT FILL PROTECTION)	*0.26*	*0.53*	*1.00*	*1.03*	*0.97*	*1.02*	*0.90*
NB-II-B (WITH FILL PROTECTION AND SPACER)	*0.35*	*0.63*	*1.08*	*1.12*	*0.94*	*0.77*	*0.95*

**All testing conducted by Riverbank Acoustical Laboratories. Sound Absorption Coefficients by the Reverberation Room Method ASTM C-423-02*

REVISIONS	DESCRIPTION	DATE	BY

DESCRIPTION: 2" ABSORPTION PANEL
CUSTOMER:
DRAWN BY: MAH
SCALE:
DRAWING NO.: NB-II
DATE:
SHEET: 1 of 1

Noise Barriers, LLC
872 S. Milwaukee Ave., #139
Libertyville, IL 60048
Phone: (800) 386-6800
Fax: (847) 362-7319
www.noisebarriers.com