


DETAIL 'B'

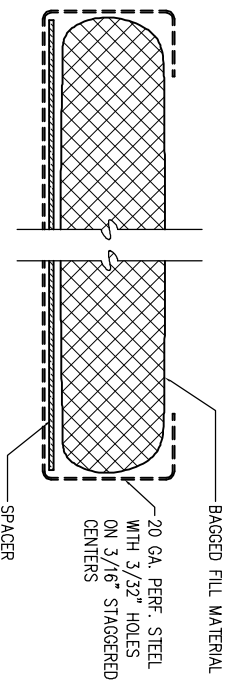

GENERAL NOTES:

1. BOTH THE 'Z' TYPE AND 'J' TYPE CONTINUOUS MOUNTING CLIPS ARE MADE OF 16 GA. BENT STEEL
2. THE PERFORATED FACE SHEET IS 22 GA. GALVANIZED PERF. WITH $\frac{3}{8}$ " HOLES ON $\frac{3}{16}$ " STAGGERED CENTERS
3. SPACER IS SELF-FURRING GALVANIZED LATH
4. FILL MATERIAL IS BAGGED FIBERGLASS ACOUSTIC FILL
5. MOUNTING FASTENERS DETERMINED BY EXISTING WALL SURFACE

SOUND ABSORPTION COEFFICIENTS

OCTAVE BAND CENTER FREQUENCIES (Hz)	125	250	500	1K	2K	4K	NRC
NB-IV (WITHOUT FILL PROTECTION)	0.70	1.08	1.15	1.05	1.05	1.01	1.10
NB-IV-B (WITH FILL PROTECTION AND SPACER)	0.78	1.10	1.19	1.04	1.02	0.81	1.10

*All testing conducted by Riverbank Acoustical Laboratories. Sound Absorption Coefficients by the Reverberation Room Method ASTM C-423-02

REVISIONS		DESCRIPTION	
DESCRIPTION	DATE	BY	CUSTOMER

4" ABSORPTION PANEL	
DRAWN BY MAH	DRAWING NO. NB-IV
SCALE	SHEET 1 of 1

Noise Barriers, LLC

2001 Kelley Court, Libertyville, IL 60048
 Phone: 847-843-0500
 Fax: 847-843-0501
 www.noisebarriers.com