

QuietPerf

Sound Absorption Panels

Durable Perforated Metal Acoustic Panels Designed to Control Reverberation and Reduce Noise

- Test Cells
- Gymnasiums
- Auditoriums
- Class Rooms
- Community Centers
- Studios
- Generator Enclosures
- Mechanical Rooms
- Waste Water Treatment
- Corridors
- Correctional Facilities
- Transportation
- Convention Centers

Anywhere reverberation or echo is a problem

Standard Panels:

- NB-II, 2" thick x 18" wide x up to 144" long
- NB-IV, 4" thick x 14" wide x up to 144" long
- NB-II "V" groove, 2-1/2" thick x 30" wide x up to 144" long
- NS, 4" thick x 48" wide x up to 144" long
- Rugged 20 gauge perforated galvanized/galvannealed steel
- Light weight and corrosive resistant 0.032 perforated aluminum


Features and Options:

- 16 gauge "Z", "J" and "Hat" channel mounting systems
- Polyester Powder-Coating available in all RAL colors
- High abuse resistance for harsh environments
- Concealed mounting brackets are available
- Poly-bagged fill protection is available
- Graffiti Resistant coatings are available
- Custom sizes and configurations are available


Installation Options:

- Wall or Ceiling
- Vertical or Horizontal
- Interior or Exterior capabilities



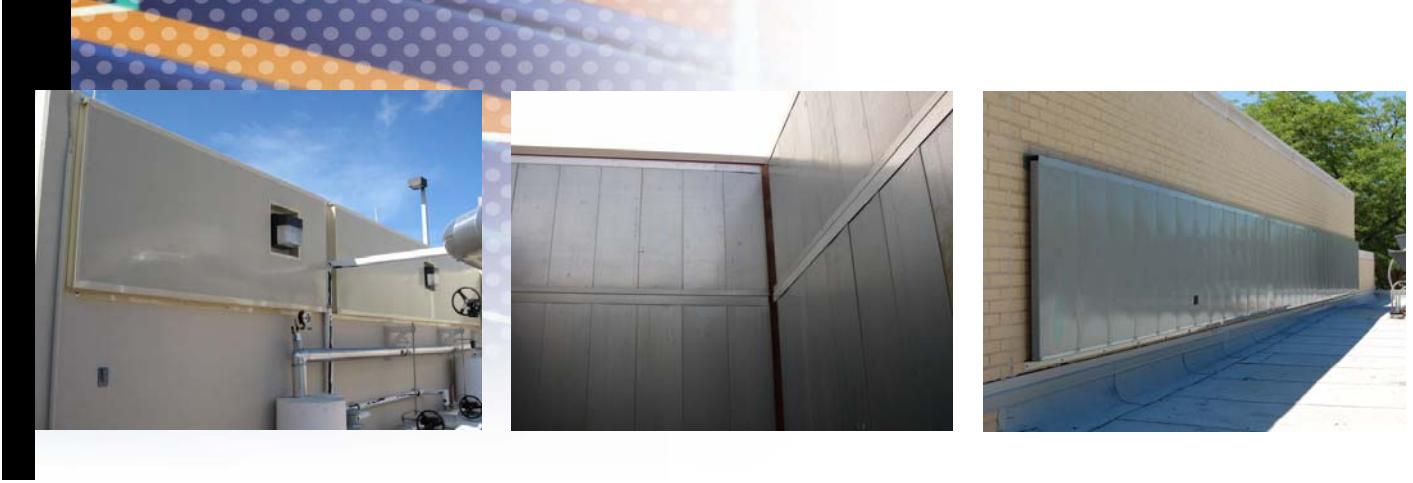

Design Details

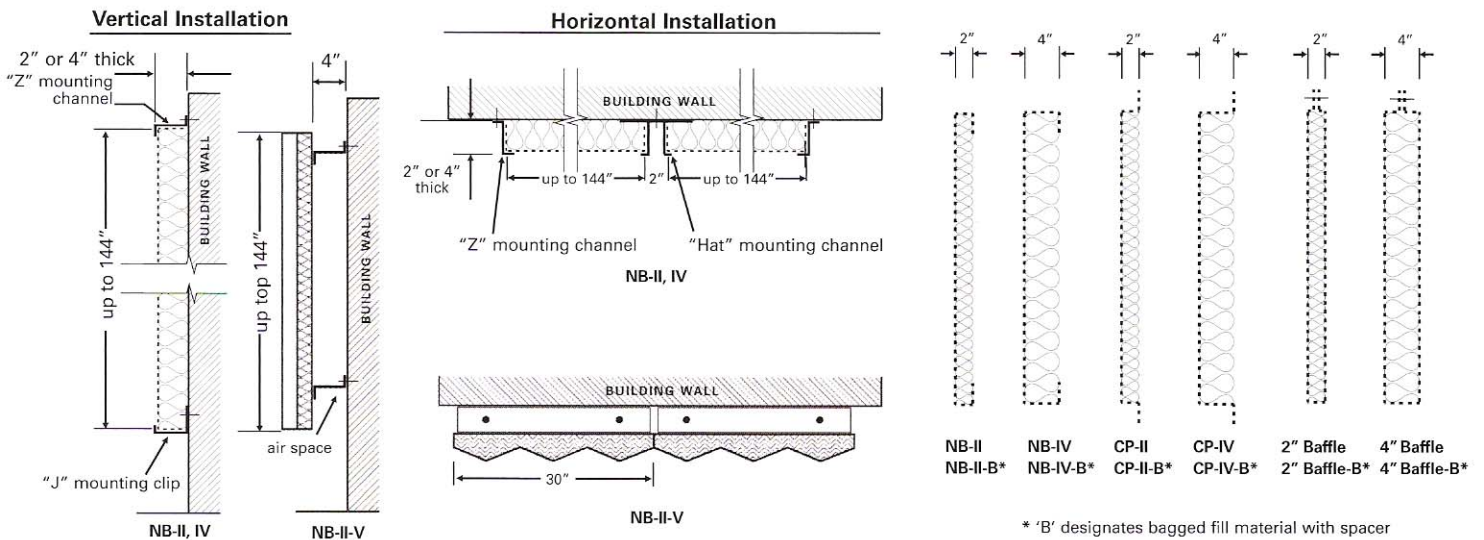

Acoustic Performance Data

1/3 Octave Band Center Frequency, Hz		125	250	500	1K	2K	4K	NRC	RAL Test#
Sound Absorption Coefficient									
NB-II	Steel	0.25	0.65	1.06	1.13	1.11	1.06	1.00	A07-124
NB-II	2" Airspace Behind	0.39	0.70	1.23	1.20	1.16	1.12	1.05	A07-125
NB-II-A	Aluminum	0.27	0.63	1.09	1.06	1.04	1.03	0.95	A08-015
NB-II-B	Bagged	0.35	0.63	1.08	1.12	0.94	0.77	0.95	A03-193
NB-IV	Steel	0.88	1.16	1.34	1.25	1.20	1.13	1.25	A07-122
NB-IV	2" Airspace Behind	0.94	1.31	1.43	1.29	1.26	1.20	1.30	A07-123
NB-IV-A	Aluminum	0.87	1.26	1.18	1.04	1.08	1.00	1.15	A08-014
NB-IV-B	Bagged	0.78	1.10	1.19	1.04	1.02	0.81	1.10	A03-191
NB-II-V	2 1/2" Thick	0.46	0.86	1.36	1.20	1.03	0.83	1.10	A04-056

All tests Conducted at Riverbank Acoustic Laboratories. Sound Absorption Coefficients by the Reverberation Room Method ASTM C-423-02.

Please contact us for specific product specifications and descriptions. CAD drawings and configurations to meet special requirements are available upon request.



www.noisebarriers.com

1207 Remington Road, Unit 107

Schaumburg, IL 60173

Phone: (847) 843-0500

Fax: (847) 843-0501

QP-05-08-E-TH