


# QuietSwing<sup>TM</sup> Sound Control Doors


## Door Hardware - Mortise Passage and Lock Sets

### Cutaway View

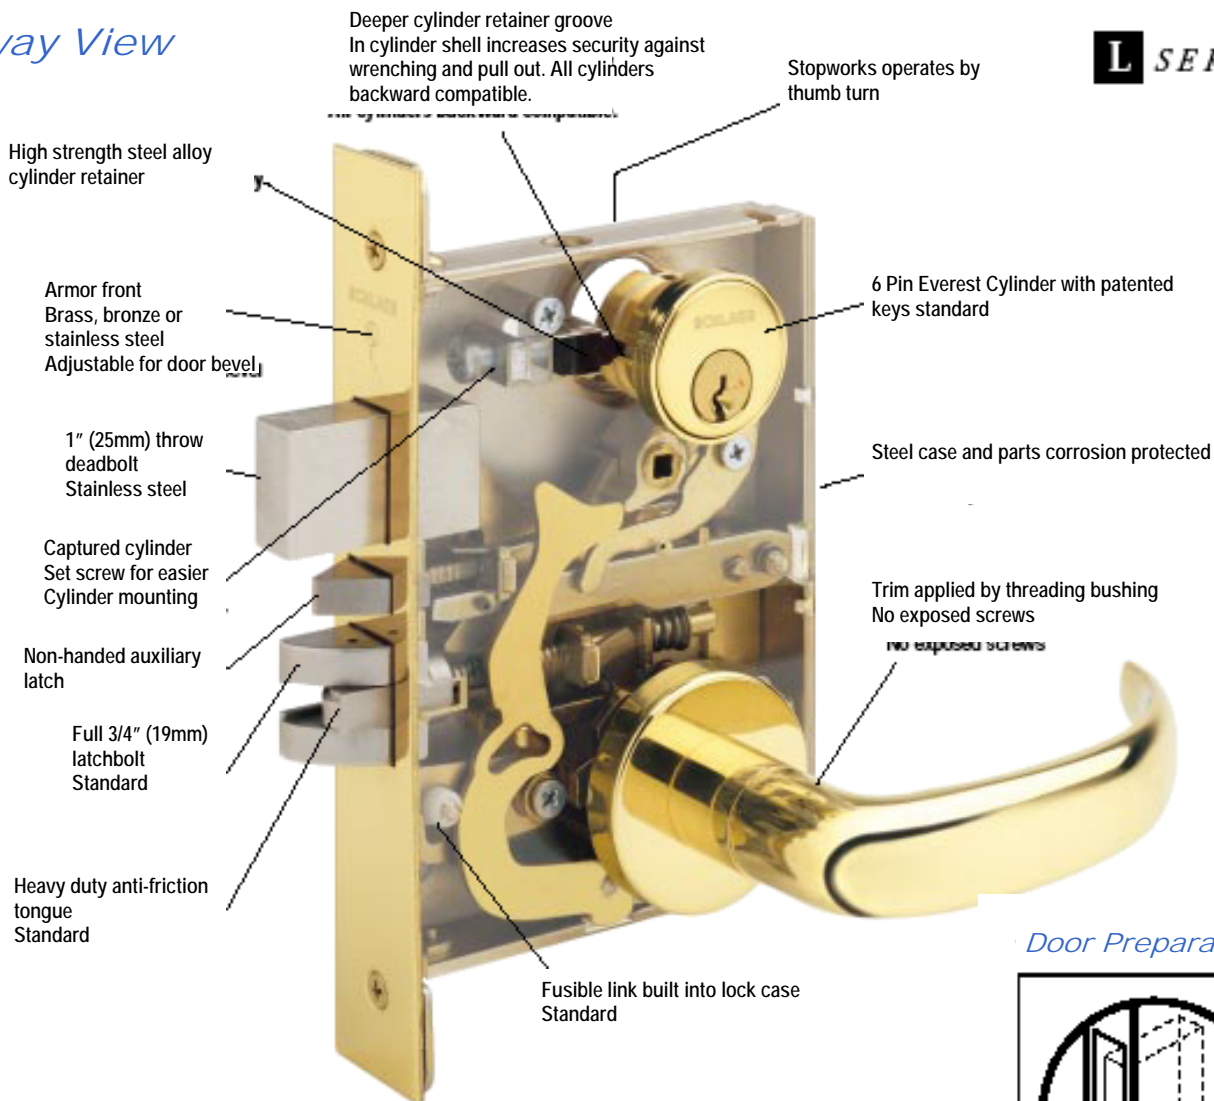

**L** SERIES

### Door Preparation



See templates.

Note: L-Series mortise locks meet all requirements for installation in doors and frames prepared in accordance with ANSI 115.1

### Performance Features

- Exceeds ANSI A156.13 Grade 1 lever torque requirements.
- Exceeds 800,000 cycle ANSI Grade 1 requirements.
- Grade 1 security with concealed mortise cylinder.
- Grade 2 security with full face mortise cylinder.
- U.L. Listed for all functions except L9076 and L9077 for 3-doors, single fire-rated doors not exceeding four feet in width and ten feet in heights.
- Universal lock chassis, one lock case for knobs and levers.
- Replaceable breakaway spindle is designed to resist excessive force from vandalism, preventing damage to lever trim and internal lock case components.
- Solid stainless steel 1 1/2" (38mm) deadbolt, 1" (25mm) projected.
- Heavy duty 3/4" (19mm) latch bolt with anti-friction tongue standard.
- Hand is quickly reversible without opening lock case.