

CONSTRUCTION/ASSEMBLY NOTES:

- PANEL SURFACES:** SOLID FACE IS 0.063" 3003 GRADE ALUMINUM. PERFORATED FACE IS 0.040" 3003 GRADE ALUMINUM WITH 3/32" HOLES ON 3/16" STAGGERED CENTERS.
- PANEL FILL:** HIGH DENSITY, SEMI-RIGID, NON-HYGROSCOPIC FIBERGLASS. THE MAXIMUM UNSUPPORTED HEIGHT OF FILL SHALL NOT EXCEEDS 23 1/2".
- FINISH:** THERMOSETTING TGIC POLYESTER POWDER COATING IN COLOR SELECTED BY ARCHITECT/CUSTOMER FROM STANDARD COLOR CHART SUPPLIED BY NOISE BARRIERS, LLC. COLOR TO BE: _____
- PANELS SHALL BE LOWERED CONSECUTIVELY BETWEEN VERTICAL WIDE FLANGED BEAMS. BARRIER WALL SHALL BE DESIGNED TO WITHSTAND WINDLOAD IN ACCORDANCE WITH THE SPECIFIED LOCAL CODE REQUIREMENTS OF THE PROJECT. REFER TO INSTALLATION DETAILS 'OPTION 1' & 'OPTION 2' FOR ALTERNATES.
- THE BARRIER PANEL ARE DESIGNED TO WITHSTAND WIND LOADS OF 40 POUNDS PER SQUARE FOOT, BOTH NEGATIVE AND POSITIVE.
- STRUCTURAL STEEL COLUMNS (IF SCHEDULED) CAN BE PROVIDED IN EITHER HOT-DIPPED GALVANIZED, PRIME PAINTED (STD. GREY), OR FINISH PAINTED IN COLOR TO MATCH PANELS.
- FINISHED PANEL WEIGHT = 3.0 lbs/sq.ft.

BARRIER PANEL ACOUSTIC PERFORMANCE

SOUND TRANSMISSION LOSS, dB


OCTAVE BAND CENTER FREQUENCIES (Hz)	125	250	500	1K	2K	4K	STC
QUIETLINE 'SL' PANEL (ALUMINUM)	14	20	31	42	40	52	33

*All data in accordance with ASTM E90-99 and E413-87


SOUND ABSORPTION COEFFICIENTS

OCTAVE BAND CENTER FREQUENCIES (Hz)	125	250	500	1K	2K	4K	NRC
QUIETLINE 'SL' PANEL (ALUMINUM)	0.89	1.23	1.18	1.08	1.06	0.95	0.95 (1.15)

*All data in accordance with ASTM C423-90a and E795-00

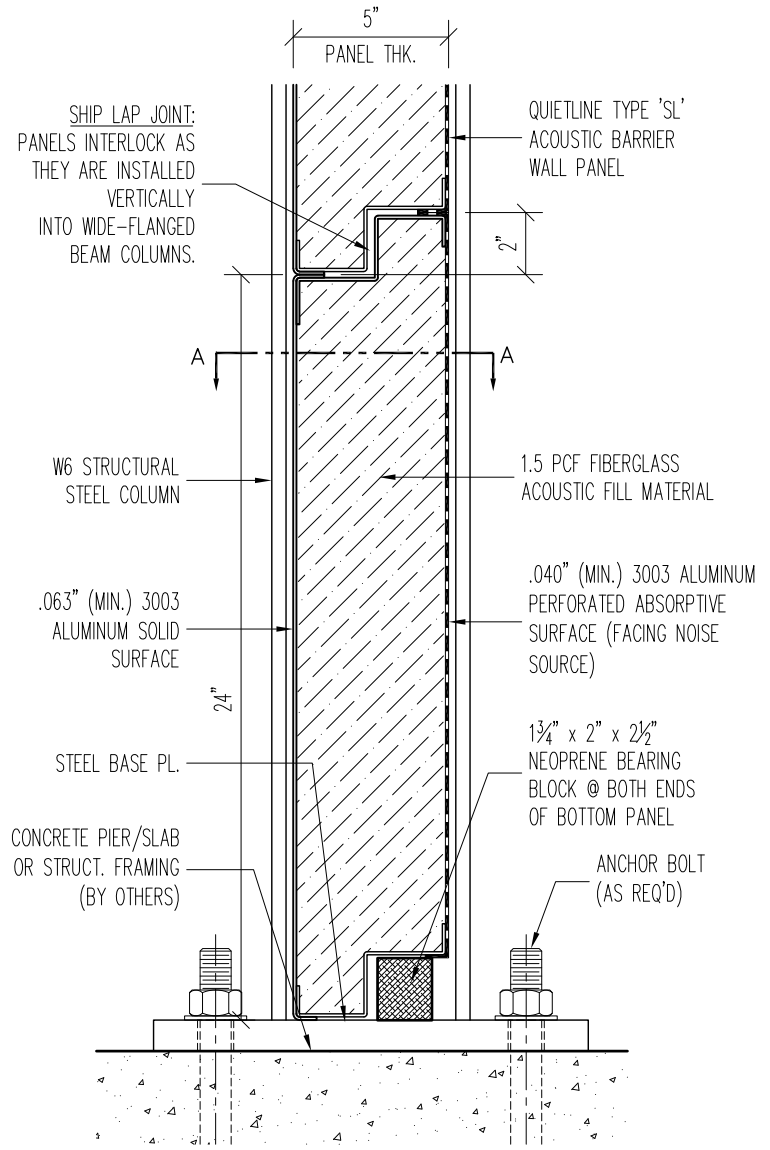

WALL SECTION DETAIL




BARRIER WALL
ISOMETRIC VIEW

QUIETLINE TYPE 'SL'
ACOUSTIC BARRIER
WALL PANEL


WIDE-FLANGED
STRUCTURAL STEEL
COLUMN (SELECTED
TO MEET WIND LOAD
REQUIREMENTS)

CONT. STRUCTURAL
STEEL ANGLES WELDED
TO WEB OF COLUMNS

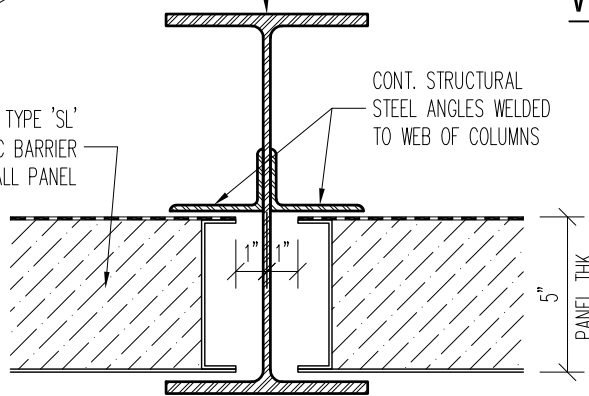

SECTION A-A - OPTION #2

WIDE FLANGED BEAM DETAIL FOR HIGH WIND
LOADS, TALL WALLS, AND POST SPACING
APPLICATIONS

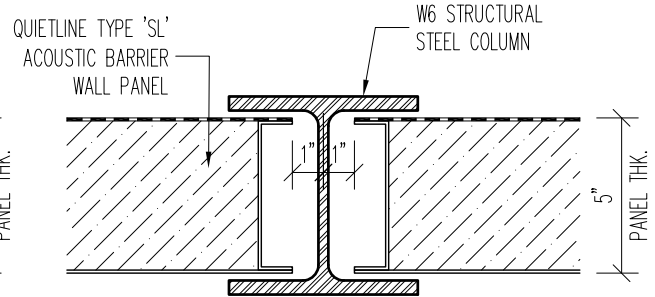

SECTION A-A - OPTION #1

WIDE FLANGED BEAM DETAIL FOR STANDARD
APPLICATIONS

QUIETLINE 'SL'
ALUMINUM
BARRIER PANEL

PROJECT: NOISE BARRIERS STANDARD DETAILS

SUBMITTED BY:

DATE:

APPROVED BY:

DATE:

SHEET:

PROPRIETARY

THIS DESIGN AND DRAWING IS THE EXCLUSIVE
PROPERTY OF NOISE BARRIERS, LLC. AND
IS SUBMITTED AS CONFIDENTIAL INFORMATION
IN CONNECTION WITH YOUR INQUIRY. IT MUST
NOT BE USED FOR ANY OTHER PURPOSES,
NOR CAN IT BE COPIED OR LOANED WITHOUT
WRITTEN PERMISSION. UPON REQUEST IT MUST
BE RETURNED IMMEDIATELY.



NOISE BARRIERS

401 AIRPORT DRIVE
NORTH AURORA, IL 60532
Phone: (847) 843-0500
Fax: (847) 843-0501
www.noisebarriers.com